

- Compact structure
- Easy operation
- General parts
- Light weight samll size



- Pure copper motor
- Double flanged drum

Technology



- High gear reducer
- Thickening rope guiding device

PRODUCT PARAMETERS

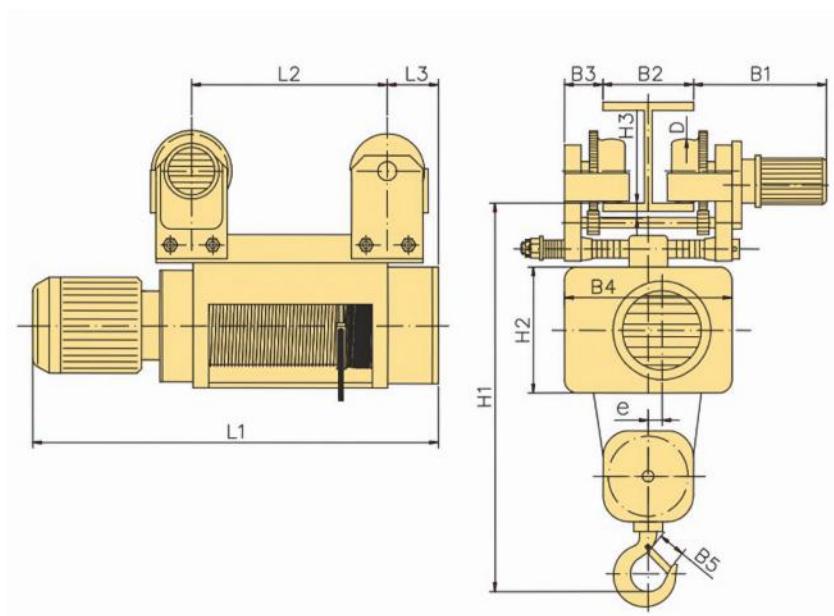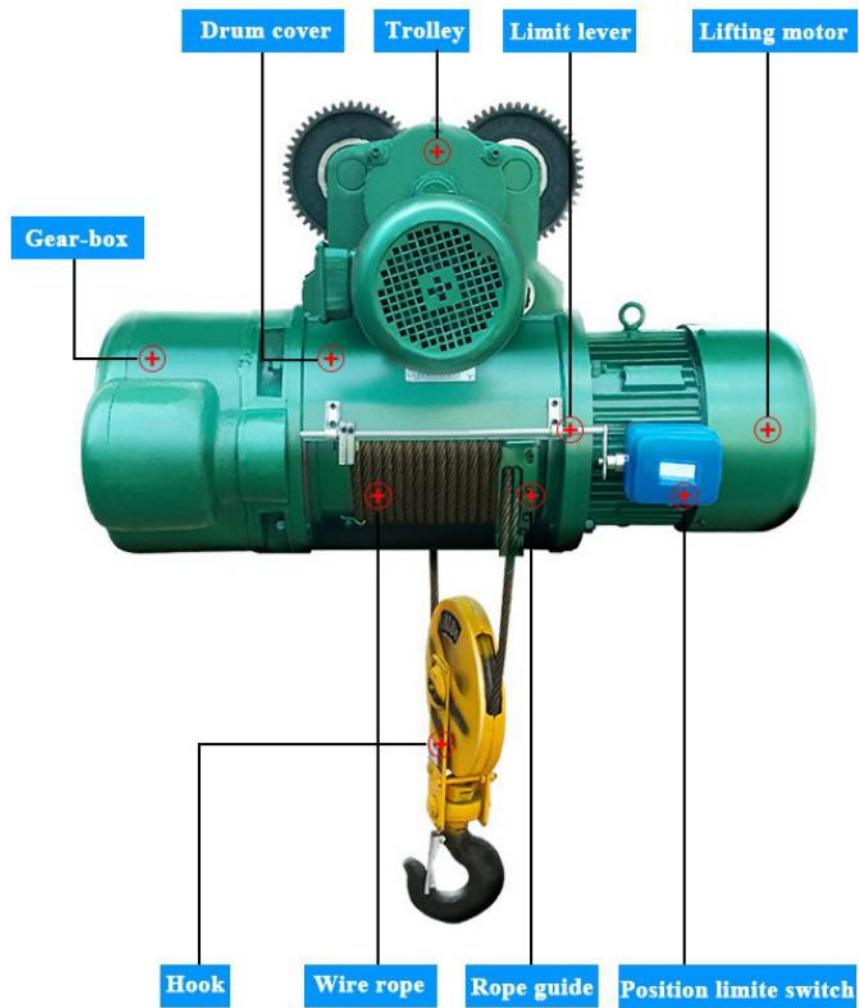

PRODUCT DETAILS

1

High Quality Wire Rope

Tensile strength up to 2160Pa
antiseptic surface phosphating treatment.



2

Limit Switch

Limit switch has high precision, wide adjustment range, safety and reliability.



3

Drum

Thickened inner tube, detachable outer tube
FEM compliance



4

Hook


T-grade high strength forging, DIN forging.



5

Electric Cabinet

36V low pressure control, The operational safety.



6

Electrical Control Box

Long life and reliable use of electrical components.



PRODUCT DISPLAY

