


PRODUCT PARAMETERS



- ① Top ② Claw ③ Spring ④ Handle
- ⑤ Oil injection port ⑥ Nameplate
- ⑦ Joystick ⑧ Sealing point
- ⑨ Joystick ⑩ Joystick

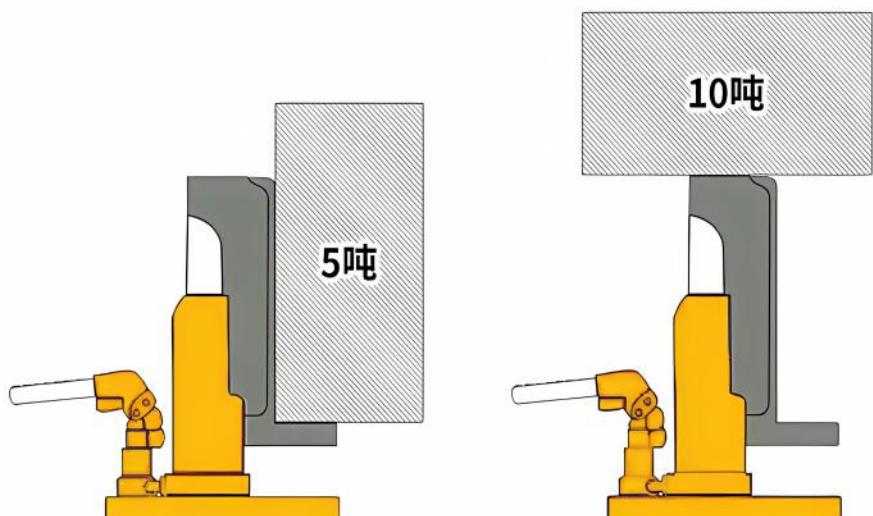

★ Confirm the above basic jack parameters before purchase

PRODUCT DETAILS





Reject oil leakage Double-layer sealed oil cylinder

Strict selection sealing ring, double-layer oil-proof, oil leakage-proof, not easy to wear



Safe and non-fracture Original cutting integral claw

The hook claw is made of steel plate cutting at one time, which is safe and reliable as a whole and not easy to break.



Hydraulic valve core Durable small oil pump

Flexible rotation, 360 ° rotation, easy to deal with a variety of scenarios



Strong bearing capacity Claw as low as 2cm

Solve the lifting problem of low starting point equipment

As low as 2cm

USAGE DIAGRAM

CLAW TOP DUAL-USE

Usage diagram

Flexible and durable high-position support and low-position support

